

UpRight
INTERNATIONAL
AB38
Series

boom lifts

compact articulated



Working heights up to
13.5m (44ft.)

Electric

Excellent up-and- over
ability with 6.1m (20ft.)
working outreach at 5.4m
(17ft. 8in.) clearance height

Simple one-hand
proportional control

Tight inside turning radius
compact 0.4m (15in.)

Efficient direct electric drive

Platform rotator

Five year
structural warranty



specifications**AB38**

working height (max.)	13.5m (44ft.)*
platform height (max.)	11.45m (37ft. 7in.)
working outreach (max.)	6.1m (20ft.)
clearance height at max. outreach	5.40m (17ft. 8in.)
platform capacity - 2 persons	215kg (475lbs.)
platform size - outside	0.6m x 1.2m (24in. x 48in.)
overall width B	1.50m (4ft. 11in.)
overall length C	4.04m (13ft. 3in.)
stowed height A	2.0m (6ft. 5in.)
inside turning radius	0.4m (1ft. 3in.)
outside turning radius	2.4m (7ft. 10in.)
ground clearance	150mm (6in.)
gross weight	3,550kg (7,826lbs.)
drive speed stowed	4km/h (2.5mph.)
drive speed elevated	0.7km/h (0.43mph.)
gradeability	19.5 degrees (36%)
power source	8 x 6V 220 Ah batteries
controls	smooth, one-hand proportional controller

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.

Refer to appropriate UpRight International Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

Proportional one-hand controller

Minimal front boom overhang

Ultra-tight inside turning radius

Tilt alarm

Large, two person platform

Direct DC drive parallel
wired wheel motors

Non-marking tyres

Duplicate boom controls
at ground level

1 year parts/service

5 year structural warranty

Cage rotator


options

Flashing amber beacon

Power cable to platform

Special paint colours

Environmental green oil

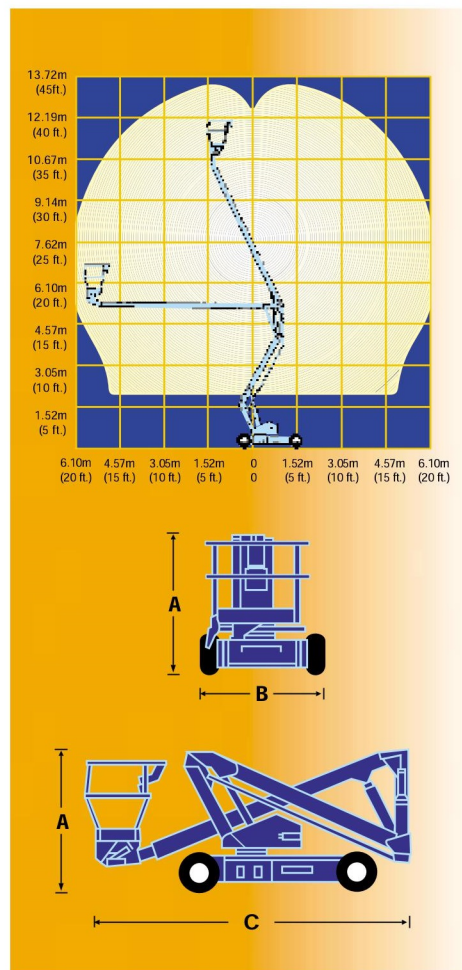

manufactured by

UpRight
INTERNATIONAL

Meets or exceeds applicable requirements
of OSHA and ANSI A92.5 - 1999.



This product is available with the CE mark
confirming compliance with all relevant
European Machinery Directives



Class leading turning radius.



Platform rotator



Compact stowed dimensions.



www.uprighteuro.com
info@uprighteuro.com

IRELAND

Tel + (353) 1 620 9300

Fax + (353) 1 620 9301

UK

Tel + 44 (0) 1952 685200

Fax + 44 (0) 1952 685255