

8.000 KG
10.000 KG




8.0-10.0t forklift specification:

General	Model				8.000 kg	10.000kg
	Power type				Diesel	
	Rated capacity			Kg	8000	10000
	Load center			mm	600	
Characteristics & Dimensions	Lift height			mm	3000	
	Free lift height			mm	200	
	Fork size		L×W×T	mm	1300×152×60	1300×180×80
	Mast tilt range		F/S	deg	6/12	
	Fork overhang(wheel center to fork face)			mm	728	
	Rear overhang			mm	680	700
	Overall dimensions	Length to face of fork		mm	3950	4250
		Overall width		mm	2245	
		Mast lowered height		mm	2850	
		Mast extended height		mm	4420	
		Overhead guard height		mm	2560	
	Turning radius(outside)			mm	3700	4050
	Min.right angle stacking aisle wiath (Add load length and clearance)			mm	4580	4950
Performance	Speed	Travel (No/Full load)		Km/h		
		Lifting (No/Full load)		mm/sec	480/350	390/340
	Max.Drawbar Pull (Full load)			N	25600	28500
	Max.Gradeability (Full load)			%	20	
Chassis	Tyres	Front	mm	4×900-20-14PR		
		Rear	mm	2×900-20-14PR		
	Tread	Font	mm	1600		
		Rear	mm	1700		
	Wheelbase			mm	2500	2800
	Ground clearance	Mast (No/Full load)		mm	240/190	
Frame (No/Full load)		mm	350/340			
Weight	Self weight			Kg	11050	12500
	Weight Distribution	Full load	Front		15621	18450
			Rear		3429	4050
		No load	Front		3978	4500
			Rear		7072	8000
Power & transmission	Battery	Voltage/Capacity		V/Ah	24/80	
	Engine	Modal			6BG1	
		Manufacture			ISUZU	
		Rated output/r.p.m		kw	82.3/2000	
		Rated torque/r.p.m		N.m	416/1400-1600	
		No.of cylinder			6	
		Bore×Stroke		mm	105×125	
		Displacement		cc	6494	
		Fuel tank capacity		L	90	
	Transmissions	Type			Powershift (Manual)	
		Stage	FWD/RVS		2/2	
	Operating pressure		For attachments		Mpa	17.5


RATED CAPACITIES AND LOAD CENTERS GRAPH

8.000 KG

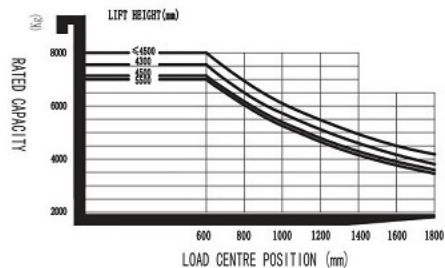

RATED CAPACITIES AND LOAD CENTERS GRAPH

10.000 KG

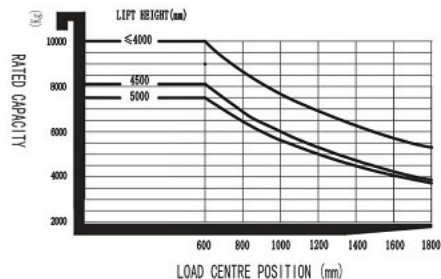

8.0-10.0t forklift

